





A1 Sub / dc / Bass Extension for A1

Subwoofer extension for the A1. The 12" long-excursion chassis utilises a double band-pass cabinet, ensuring punchy and very deep bass response.
8 x M8 mounting points for installation.
Optionally available as DC-Version for satellite operation.




PRODUCT SPECIFICATIONS

Speaker Components	12"
Speaker Components - DC	12" - doublecoil
Description	Bass Extension for A1
Powerhandling - AES / Peak	300 Watt / 900 Watt
Powerhandling - DC - AES / Peak	2x 150 Watt / 2x 450 Watt
Impedance - nominal	8 Ohm
Impedance - DC - nominal	2x 4 Ohm
SPL 1m - 1Watt / Peak	94dB / 121dB
Usable Range	35Hz - 150Hz
Tuning Frequency - Excursion min.	38Hz / 110Hz
Connectors	2x Neutrik Speakon 4-pol Coding: 1+/- HiMid, 2+/- Sub
Connectors - DC	2x Neutrik Speakon Input 2x Neutrik Speakon Output Coding: 1+/- , 2+/- n.c.
Rigging - flying points	8 x M8
Weight	18,5kg
Weight - DC	19,5kg
Size - height x width x depth	35,0 x 80,0 x 30,0 cm
Art. Nr.	A1 Sub - 0220 A1 Sub DC - 0220.DC

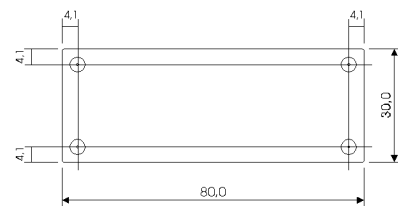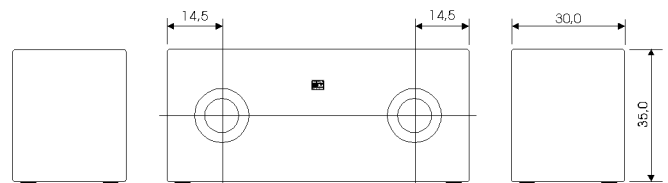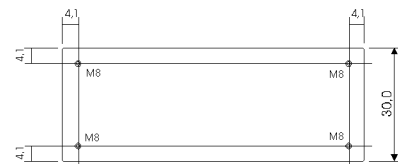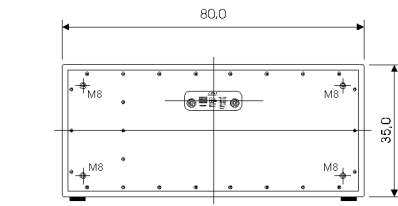

A1 Sub / dc / Bass Extension for A1

A1 Sub Frequenzgangkurve

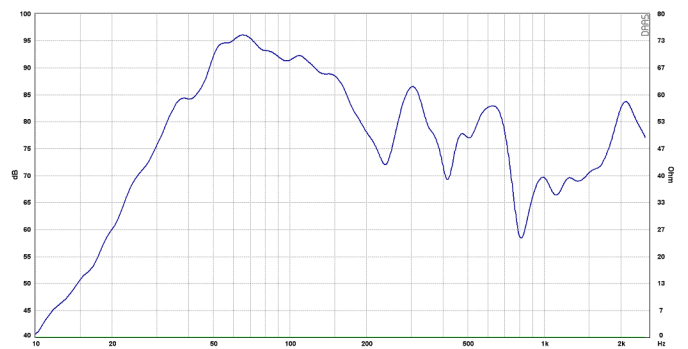

A1 Sub Impedanzkurve



For more information, please visit our Data CD-Rom

Accessories (more accessories you can find in our general list of accessories)

Lifting eye bold M8 - DIN 580



Order number: 73600 (M8)

Flightcases on request