





A8 Sub / High Performance Subwoofer

15" subwoofer extension for the A8.
 Connectable crossover for passive operation.
 Large, low-loss bass reflex chambers and the Neodym chassis with 100mm voice coil ensure exceptionally punchy and powerful bass response down to a lower cut-off frequency of 40 Hz.
 Optionally available as DC version for satellite operation.



PRODUCT SPECIFICATIONS


Speaker Components	15" Neodym
Description	High Performance Subwoofer
Powerhandling - AES / Peak	600 Watt / 1800 Watt
Impedance - nominal	8 Ohm
SPL 1m - 1Watt / Peak	97dB / 128dB
Usable Range	40Hz - 500Hz
Tuning Frequency - Excursion min.	48Hz
Connectors	2x Neutrik Speakon 4-pol
	Coding: 1+/- HiMid, 2+/- Sub
Handles	2 x 2D Handle
Rigging - flying points	3 x M10 optional
Fittings	M20 on top
Weight	24kg
Size - height x width x depth	69,8 x 45,0 x 42,5 cm
Art. Nr.	0280

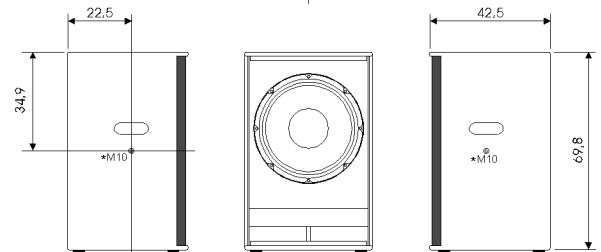


* M10 points optionally



A8 Sub passiv Frequenzgangkurve

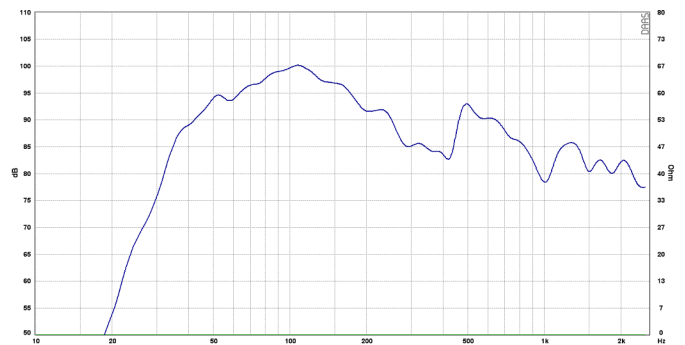

A8 Sub passiv Impedanzkurve

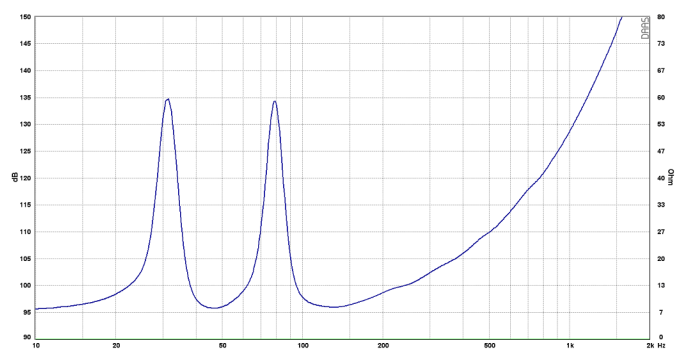


For more information, please visit our Data CD-Rom

Accessories (more accessories you can find in our general list of accessories)

Flying Bracket for A8 Sub incl. screws

(per unit: 2 pcs. M10 x 30 adjustable clamping lever - with axial bearing)

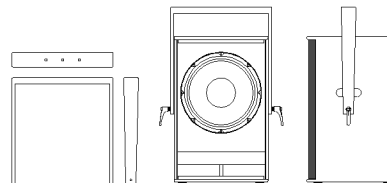

Order number: 01217 set

Speaker Pole, M20, 1m adjustable, K&M



Order number: 03022


Cover for A8 Sub - padded



Order number: 01241

Flightcase for 2 pcs. A8 Sub

Heavy duty, 6.5 mm birch multiplex, PVC coated, ball corners, 6 pcs. recessed sprung handles, 4 pcs. butterfly catches, 100 mm Blue Wheels, 2 pcs. with brake, interior lined with felt.

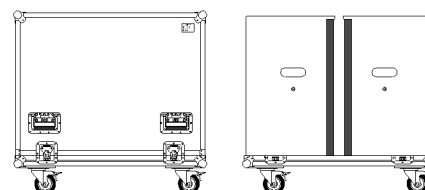

Order number: 16012

more flightcases
on request