


Ultra-compact speaker system for high-quality transmission of speech and music over short and medium distances. Due to good speech intelligibility and high performance the TSNano is particularly suitable for fastidious permanent installations in the industrial sector.




PRODUCT SPECIFICATIONS


| | |
|-----------------------------------|------------------------------|
| Speaker Components | 6,5" / 1" |
| Description | Multipurpose Sound System |
| Powerhandling - AES / Peak | 120 Watt / 360 Watt |
| Impedance - nominal | 16 Ohm |
| SPL 1m - 1Watt / Peak | 93dB / 118dB |
| Usable Range | 80Hz - 18kHz |
| Tuning Frequency - Excursion min. | 95Hz |
| X - Overpoint - acoustical | 2,2kHz |
| Connectors | 2x Neutrik Speakon 4-pol |
| | Coding: 1+/- HiMid, 2+/- Sub |
| Coverage - horizontal / vertical | 90° x 60° rotatable |
| Rigging - flying points | 6 x M10 |
| Weight | 6,7kg |
| Size - height x width x depth | 33,9 x 19,4 x 19,4 cm |
| Art. Nr. | 0985 |

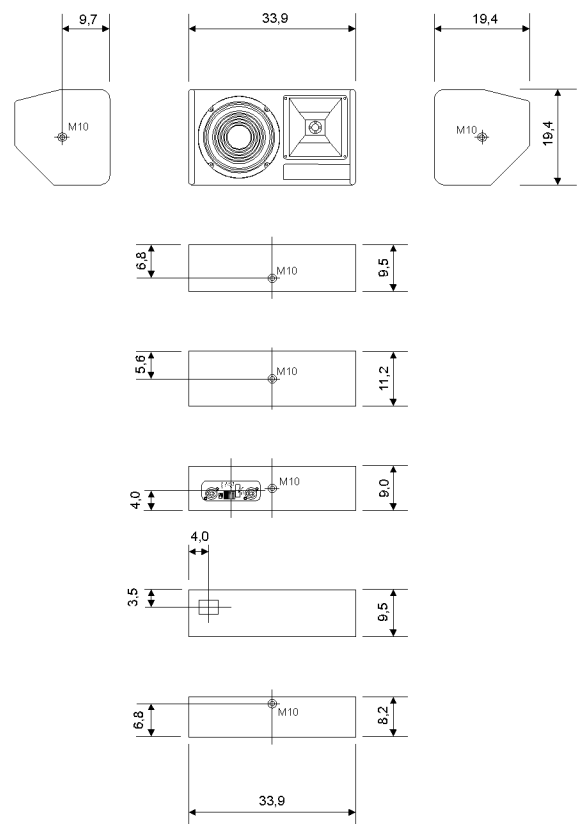

TSNano 90° x 60° horizontal - 2D Directivity Plot

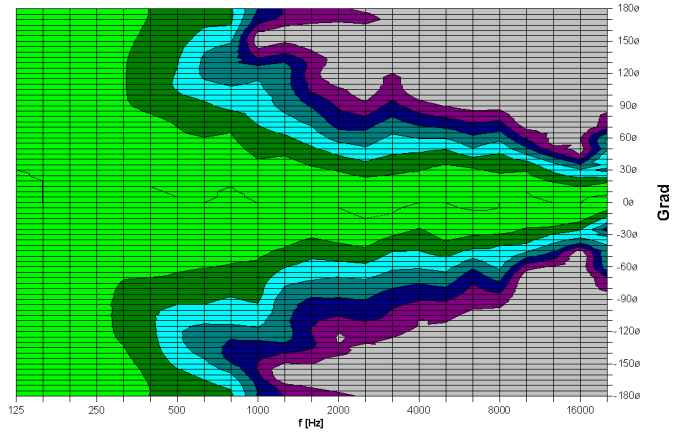

TSNano 90° x 60° vertikal - 2D Directivity Plot

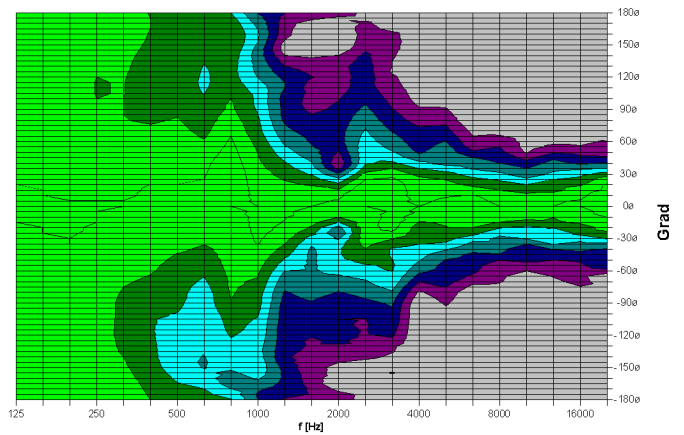


For more information, please visit our Data CD-Rom

Accessories (more accessories you can find in our general list of accessories)

Flying Bracket for TSNano horizontal assembly incl. screws


(per unit: 2 pcs M10 x 20 socket head screws,
spring - and rubber washers.
- optional feature: 2 pcs M10 x 20 ergostyle lobe knob)



Order number: 01210H set


Flying Bracket for TSNano incl. screws

(per unit: 2 pcs. M10 x 20 ergostyle lobe knob
and rubber washers)

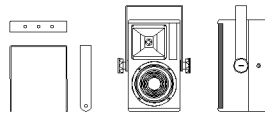

Order number: 012 12 set

Flange M10 for TSNano



Order number: 08126

Bag for 2pcs. TSNano



Order number: 01248

Flightcases
on request